



## VHF AND UHF TRANSCEIVERS

### IC-F3GT

(VHF transceiver with keypad)

### IC-F4GT

(UHF transceiver with keypad)

### IC-F3GS

(VHF transceiver without keypad)

### IC-F4GS

(UHF transceiver without keypad)



Meets  
MIL-STD 810



Icom Inc.



# Supports demanding com

DURABILITY, DEPENDABILITY, OPERATION SIMPLICITY, STYLE, RUGGEDNESS, ECONOMICAL USE, AND MORE ARE REQUIRED FOR COMMERCIAL TRANSCEIVERS. BUT ONLY A FEW SUCH TRANSCEIVERS ARE AVAILABLE, PARTICULARLY FOR PORTABLES. NOW FROM ICOM— THE IC-F3G SERIES OF PORTABLE TRANSCEIVERS AIM TO BECOME THE MOST HIGHLY REPUTABLE OF ALL COMMERCIALS. SUPERIOR PERFORMANCE AND FEATURES, EVERYTHING YOU REQUIRE IS INCLUDED. ICOM'S TECHNOLOGY GIVE YOU SATISFACTION YOU NEVER KNEW BEFORE.

## VHF AND UHF TRANSCEIVERS

### IC-F3GT

VHF transceiver with keypad

### IC-F3GS

VHF transceiver without keypad

### IC-F4GT

UHF transceiver with keypad

### IC-F4GS

UHF transceiver without keypad

#### Supports multiple signalling and flexible selective calling

CTCSS/DTCS encoder/decoder, and DTMF, 2/5-tone encoder with user programmable CTCSS, DTCS capabilities, are built-in. The optional UT-96<sup>†</sup> (for 2/5-tone), or UT-108<sup>†</sup> (for DTMF) allows decode with ANI functions. In addition, special tone code, for group, and individual calls, and more features are available to support flexible, perfect selective calling operations.

- 7-digit code can be used as the 5-tone
- Direct individual station/group call with/without own ID transmission, or through repeater
- Selectable 5-tone format includes user tone format programming capability (Encode and Decode frequencies, Tone period, No-tone timer, and Tone length)
- Text or ID number indication
- Desired 5-tone code entering for both individual and group call
- Transceiver remote control—stun, kill, and scan start/stop functions
- Selectable comparing digit code for decoding
- Selective calling capability from a public telephone (UT-108 DTMF DECODER is required; base/repeater station must be connected to the public telephone network)

#### Man down function\*

Automatically sending an emergency signal when the transceiver is left in the horizontal position for a pre-set time.

\*Optional UT-113<sup>†</sup> is required.

#### Trunking capabilities\*

Compatible with the SmarTrunk II™, or the LTR® trunking systems.

\*Optional UT-105<sup>†</sup> for SmarTrunk II™, UT-111<sup>†</sup> for LTR® trunking is required.

#### Operation security

Optional voice scrambler units, UT-109<sup>†</sup> and UT-110<sup>†</sup>, for secure communications are available.

#### Programmable key assign

Up to 8 programmable keys are available to assign specific functions. In particular, the red key can be used for important function, such as emergency call, etc.

#### Wide/narrow channel switchable depending on version



#### MIL spec. durability

54(W)×132(H)×35(D) mm\* compact body with durable, dependable construction, meets the MIL standard.


\*2 1/8(W)×5 3/16(H)×1 7/16(D) in



#### Simple operation

Enlarged 7-character alphanumeric automatic backlit LCD, and function keys make for easier operation.

#### • System image diagram

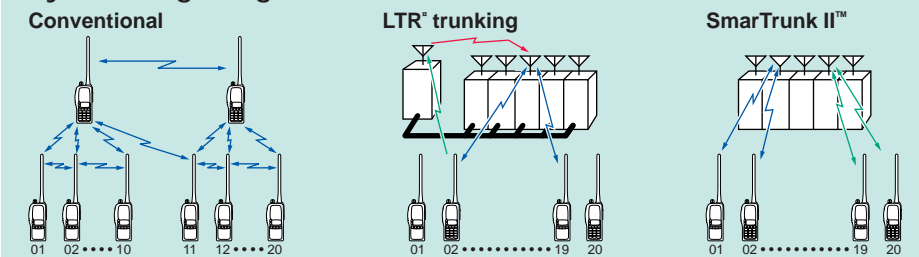



# Communication with simple operation



## OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

### BATTERY PACKS AND CASE



BP-208N BP-209N/BP-222N BP-210N BP-211N

BATTERY PACKS & CASE	TYPE & CAPACITY	OUTPUT POWER		BATTERY LIFE
		IC-F3GT/GS	IC-F4GT/GS	
BP-208N	AA (LR6) batteries x 6	1 W typ.	1 W typ.	—
BP-209N	Ni-Cd 7.2 V/1100 mAh	5 W typ.	4 W typ.	8 hours
BP-210N	Ni-MH 7.2 V/1650 mAh	5 W typ.	4 W typ.	11 hours
BP-211N	Li-Ion 7.4 V/1800 mAh	5 W typ.	4 W typ.	12 hours
BP-222N	Ni-Cd 7.2 V/600 mAh	5 W typ.	4 W typ.	4.5 hours

Approx.: (Tx (Hi): Rx: standby=5:5:90)

### BC-121N+AD-101 (6 pcs.)



### BC-144N +BC-145



### BC-146 +BC-147



### BC-144N DESKTOP CHARGER + BC-145 AC ADAPTER

For rapid charging of battery packs (except for BP-211N). The BC-145 may be supplied depending on version. Charging time: 1.5 to 2 hours. BC-119N + AD-101 + BC-145 rapidly charges BP-211N as well as other battery packs.

### BC-121N MULTI-CHARGER + AD-101 CHARGER ADAPTER + BC-124 AC ADAPTER

For rapid charging of up to 6 battery packs (six AD-101s are required), BP-209N, BP-210N, BP-211N or BP-222N. The BC-124 outputs 12 V DC and has 7 A capacity for the BC-121N. Charging time: 1.5 to 2 hours. OPC-656 DC POWER CABLE: For use the BC-121N with a DC power supply. (12-20 V DC required.)

### BC-146 DESKTOP CHARGER + BC-147 AC ADAPTER

Charges the battery pack, BP-209N, BP-210N or BP-222N with/without transceiver in 12, 18.5, 6.5 hours (approx.), respectively. An AC adapter, BC-147, is additionally required. Cannot charge Li-Ion battery, BP-211N.

### SPEAKER-MICROPHONE



HM-46L

Slim dimensions. Equipped with an earphone jack and a transmit indicator.

### HEADSETS and PTT/VOX UNIT



▲HS-94

▲HS-95

▲HS-97

▲VS-1L

HS-94: Earhook headset with flexible boom microphone.

HS-95: Behind-the-head headset with flexible boom microphone.

HS-97: Throat microphone fits around your neck and picks up a speech vibration.

VS-1L: PTT/VOX unit. Required when using these headsets with the transceiver.



HS-51  
HEADSET

For hands-free operation. Includes VOX, PTT and "one-touch" PTT with a time-out timer. (UHF only in USA and Canada)



MB-86

MB-103

MB-86: Swivel type belt clip. Provide a fast and easy way to remove the radio from your belt.

MB-103: Alligator type clip. Same as supplied.



MB-96F

MB-96F: Fixed type belt hanger for use with MB-103.

MB-96N: Swivel belt hanger.

## Long life batteries


The standard Ni-Cd battery pack, allows 8 hours\* operation. Optional battery pack for extended operation, and a battery case for use while charging the battery, or for emergency operation, etc., are available.

\*approx.; Tx:Rx:Standby ratio = 5:5:90

## Other features

- 100 or 40 memory channels are available
- Powerful 5 W output for IC-F3GT/GS, 4 W output for IC-F4GT/GS
- Selectable channel attribute from emergency, priority A/B, and normal
- Normal and priority scans
- Auto LCD contrast
- 2 step power saver
- 5 autodialing memories for DTMF
- Busy, repeater lockout functions
- Power ON password
- Mic. remote control function, and more...

†only one of either unit can be installed.

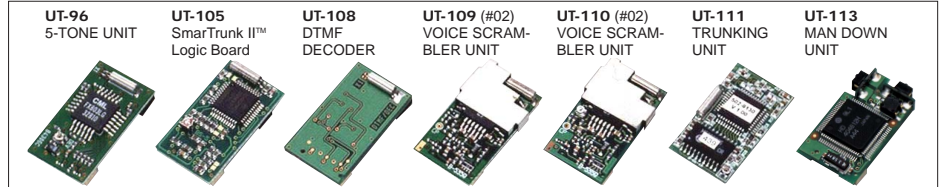

UT-96 : Provides either the 2/5-tone encode/decode and ANI capabilities.

UT-105 : Provides SmarTrunk II™ capabilities. SmarTrunk is a trademark of SmarTrunk System Inc.

UT-108 : Provides DTMF decode and ANI capabilities.

UT-109 : Provides operating security. Up to 32 scrambling codes are available.

UT-110 : Provides higher operating security. Up to 1020 (255 codes x 4 groups) scrambling codes are available.

UT-111 : Provides LTR™ trunking capabilities.

UT-113 : Allows man down function



Provides clear audio in noisy environments.



Allows you to connect a BNC-type antenna. (For maintenance use only)

### STUBBY ANTENNAS



FA-SC56VS

FA-SC57VS

FA-SC73US

	Freq. range	Length	Ring Color
FA-SC56VS	146-162 MHz	80mm	Red
FA-SC57VS	160-174 MHz	80mm	Green
FA-SC73US	450-490 MHz	60mm	Red

## SPECIFICATIONS

## GENERAL

- Frequency range :
  - IC-F3GT/GS : 136–150 MHz 146–174 MHz
  - IC-F4GT/GS : 400–430 MHz 440–470 MHz
  - 470–500 MHz
  - 490–512 MHz (USA)
  - 490–520 MHz (others)
- Number of channel : 100Ch or 40Ch (Varies according to version)
- Channel spacing : 12.5 kHz, 20 kHz, 25kHz  
12.5/25kHz
- Antenna impedance : 50 Ω
- Frequency error : ±0.0005% (EIA; IC-F3GT)  
±0.00025% (EIA; IC-F4GT)  
±1.5 kHz (ETS; 12.5 kHz)  
±2 kHz (ETS; 25/20 kHz)
- PLL channel step : 5 kHz, 6.25 kHz, 7.5 kHz
- Power supply requirement : 7.2 V DC (Icom battery pack)
- Current drain (at 7.2 V DC) :
  - Transmit at 5 W : 1.6 A (IC-F3GT/GS)
  - at 4 W : 1.55 A (IC-F4GT/GS)
  - at 1 W : 0.7 A (IC-F3GT/GS)
  - 0.8 A (IC-F4GT/GS)
  - Receive at AF max. : 250 mA
  - at stand-by : 70 mA
- Operating temp. range : –30°C to +60°C; –22°F to +140°F (EIA)  
–25°C to +55°C (ETS)
- Dimensions : 54(W)×132(H)×35(D) mm  
(projections not included) ; 2½(W)×5¾(H)×1¼(D) in
- Weight (with BP-209) : 370 g; 13.1 oz

## TRANSMITTER

- Output power : IC-F3GT/GS 5.0 W  
IC-F4GT/GS 4.0 W
- Max. freq. deviation : ±2.5 kHz, ±5 kHz, ±4 kHz
- Modulation limiting : 80–100%
- Audio harmonic distortion : 3% max. (1 kHz/40% dev.)  
5% max. (1 kHz/60% dev.)
- Spurious emissions : 73 dBc (EIA)  
Less than 0.25 μW (ETS)
- Adjacent ch. power : 60 dB typ. (EIA; 12.5 kHz)  
70 dB typ. (EIA; 25 kHz)  
60 dB (ETS; 12.5 kHz)  
70 dB (ETS; 25/20 kHz)
- Residual modulation : 40 dB typ. (EIA; 12.5 kHz)  
45 dB typ. (EIA; 25 kHz)  
43 dB (ETS; 12.5 kHz)  
45 dB (ETS; 25/20 kHz)
- External MIC connector : 3-conductor 2.5 (d) mm (1/8")/2.2 kΩ

Microsoft and Windows are registered trademarks of Microsoft Corporation in the U.S.A. and other countries. SmarTrunk II is a trademark of the SmarTrunk System, Inc. LTR is a registered trademark of the E.F. Johnson Company.

## RECEIVER

- Sensitivity :
  - IC-F3GT/GS : 0.25 μV (at 12 dB SINAD)
  - 0.63 μV (at 20 dB SINAD)
  - IC-F4GT/GS : 0.3 μV (at 12 dB SINAD)
  - 0.79 μV emf (at 20 dB SINAD)
- Squelch sensitivity (at threshold):
  - IC-F3GT/GS : 0.25 μV
  - IC-F4GT/GS : 0.3 μV
- Adjacent Ch. selectivity : 65 dB typ. (EIA; 12.5 kHz)  
75 dB typ. (EIA; 25 kHz)  
60 dB (ETS; 12.5 kHz)  
70 dB (ETS; 25/20 kHz)
- Spurious response : 70 dB (EIA)  
70 dB (ETS)
- Intermodulation : 70 dB (EIA)  
65 dB (ETS)
- Hum and noise ratio : 40 dB typ. (EIA; 12.5 kHz)  
45 dB typ. (EIA; 25 kHz)  
43 dB (ETS; 12.5 kHz)  
45 dB (ETS; 25/20 kHz)
- Audio output power : 0.5 W at 5% distortion with an 8 Ω load
- External SP connector : 2-conductor 3.5 (d) mm (1/8")/8 Ω

## Applicable U.S. Military Specifications

Icom makes rugged products that meet MIL-STD requirements and strict environmental standards as follows.

Standard	MIL 810C		MIL 810D		MIL 810E	
	Method	Procedure	Method	Procedure	Method	Procedure
Low Pressure	500.1	I	500.2	I, II	500.3	I, II
High Temp.	501.1	I	501.2	I, II	501.3	I, II
Low Temp.	502.1	I	502.2	I, II	502.3	I, II
Temp. Shock	503.1	I	503.2	I	503.3	I
Solar Radiation	505.1	I	505.2	I	505.3	I
Rain	506.1	I, II	506.2	I, II	506.3	I, II
Humidity	507.1	I, II	507.2	II, III	507.3	II, III
Salt Fog	509.1	I	509.2	I	509.3	I
Dust	510.1	I	510.2	I	510.3	I
Vibration	514.2	VIII, X	514.3	I	514.4	I
Shock	516.2	I, II, V	516.3	I, IV	516.4	I, IV

Measurements made in accordance with EIA/TIA-152C/204D, or ETS 300-086. All stated specifications are typical and subject to change without notice or obligation.

## Supplied accessories:



## Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan

Phone: +81 (06) 6793 5302

Fax: +81 (06) 6793 0013

URL: <http://www.icom.co.jp/world/index.html>

## Count on us!

## Icom America Inc.

2380 116th Avenue NE,  
Bellevue, WA 98004, U.S.A.  
Phone : +1 (425) 454-8155  
Fax : +1 (425) 454-1509  
E-mail : [sales@icomamerica.com](mailto:sales@icomamerica.com)  
URL : <http://www.icomamerica.com>

## Icom Canada

Glenwood Centre #150-6165 Highway 17,  
Delta, B.C., V4K 5B8, Canada  
Phone : +1 (604) 952-4266  
Fax : +1 (604) 952-0090  
E-mail : [info@icomcanada.com](mailto:info@icomcanada.com)  
URL : <http://www.icomcanada.com>

## Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575  
290-294 Albert Street, Brunswick,  
Victoria, 3056, Australia  
Phone : +61 (03) 9387 0666  
Fax : +61 (03) 9387 0022  
E-mail : [sales@icom.net.au](mailto:sales@icom.net.au)  
URL : <http://www.icom.net.au>

## Icom New Zealand

146A Harris Road, East Tamaki,  
Auckland, New Zealand  
Phone : +64 (09) 274 4062  
Fax : +64 (09) 274 4708  
E-mail : [inquiries@icom.co.nz](mailto:inquiries@icom.co.nz)  
URL : <http://www.icom.co.nz>

## Icom (Europe) GmbH

Communication Equipment  
Himmelgeister Str. 100,  
D-40225 Düsseldorf, Germany  
Phone : +49 (0211) 346047  
Fax : +49 (0211) 333639  
E-mail : [info@icom-europe.com](mailto:info@icom-europe.com)  
URL : <http://www.icomeurope.com>

## Icom Spain S.L.

Ctra. de Gracia a Manresa Km. 14,750  
08190 Sant Cugat del Valles Barcelona, Spain  
Phone : +34 (93) 590 26 70  
Fax : +34 (93) 589 04 46  
E-mail : [icom@icomspain.com](mailto:icom@icomspain.com)  
URL : <http://www.icomspain.com>

## Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay,  
Kent, CT6 8LD, U.K.  
Phone : +44 (01227) 741741  
Fax : +44 (01227) 741742  
E-mail : [info@icomuk.co.uk](mailto:info@icomuk.co.uk)  
URL : <http://www.icomuk.co.uk>

## Icom France S.a

Zac de la Plaine, 1,  
Rue Brindejone des Moulinais BP 5804,  
31505 Toulouse Cedex, France  
Phone : +33 (5) 61 36 03 03  
Fax : +33 (5) 61 36 03 00  
E-mail : [icom@icom-france.com](mailto:icom@icom-france.com)  
URL : <http://www.icom-france.com>

## Icom Polska

Sopot, 3 maja 54, Poland  
Phone : +48 (58) 550 7135  
Fax : +48 (58) 551 0484  
E-mail : [icompolska@icompolska.com.pl](mailto:icompolska@icompolska.com.pl)  
URL : <http://www.icompolska.com.pl>

## Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone : +886 (02) 2559 1899  
Fax : +886 (02) 2559 1874  
E-mail : [sales@asia-icom.com](mailto:sales@asia-icom.com)  
URL : <http://www.asia-icom.com>

## Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding  
Road, Haidian District, Beijing, 100039, China  
Phone : +86 (010) 5889 5391/5392/5393  
Fax : +86 (010) 5889 5395  
E-mail : [bjicom@bjicom.com](mailto:bjicom@bjicom.com)  
URL : <http://www.bjicom.com>



Icom Inc. (Japan), is an ISO 9001 and ISO 14001 certification acquired company.

## Your local distributor/dealer: